


Pulverizer (Fixed)


- Wide jaw opening for work efficient
- Trunnion mounting cylinder for compact design
- High strength and wear resistance materials (Hardox) for reliability
- Speed-up valve for fast work



Pin on Type
Mounting (P)

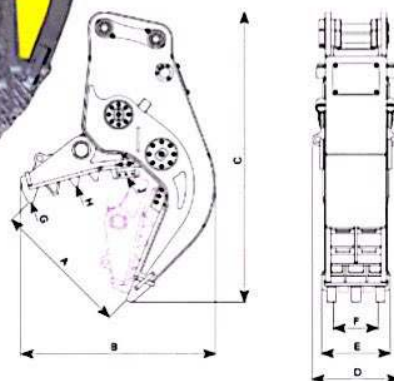

Bolt on type
Mounting (B)

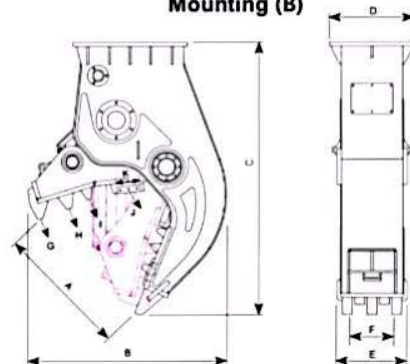

Description		units	PR050F	PR080F	PR150F	PR200F	PR300F
Weight		kg	580	650	1,370	1,760	2,520
Max Opening Width	A	mm	745	725	840	980	1,110
Overall Width	B	mm	1,050	1,060	1,215	1,445	1,590
Overall Length	C	mm	1,545	1,605	1,665	1,955	2,230
Overall Height	D	mm	470	475	580	655	680
Body Width	E	mm	370	370	450	505	605
Jaw Width	F	mm	255	310	310	320	380
Crushing Force	G	kN	216 (@ 24MPa)	245 (@ 28MPa)	373 (@ 33MPa)	471 (@ 33MPa)	637 (@ 33MPa)
	H	kN	333 (@ 24MPa)	382 (@ 28MPa)	490 (@ 33MPa)	608 (@ 33MPa)	853 (@ 33MPa)
	I	kN	-	-	618 (@ 33MPa)	765 (@ 33MPa)	1,108 (@ 33MPa)
Cutting Force	J	kN	716 (@ 24MPa)	951 (@ 28MPa)	1,393 (@ 33MPa)	1,814 (@ 33MPa)	1,971 (@ 33MPa)
Cutter Length	K	mm	100	100	170	170	200
Allowable Max. System Pressure		MPa	27	30	38	38	38
Recommended Oil Flow		lpm	50 ~ 90	60 ~ 130	110 ~ 200	150 ~ 250	250 ~ 300
Speed-up Valve		-	No	No	Option	Option	Option
Recommended Carrier Weight		ton	4.5 ~ 7.0	5.5 ~ 10	12 ~ 18	20 ~ 28	29 ~ 40
Mounting type		-	P	P	B	P,B	P,B

* Above specifications are subject to change without prior notice