




- STRENGTHS**
- Oil-bath bearing
 - Easy and uncomplicated maintenance
 - Wear-resistant bottom with high impact resistance
 - Non-return valve (for one rotating movement only)
 - Bolted rubber TPMBPSTGPGSTIPDL
 - OBOBMEFHSSFFISPBPOIFBE



OPTIONAL

- Hydraulic rotation
- Kit to centre poles

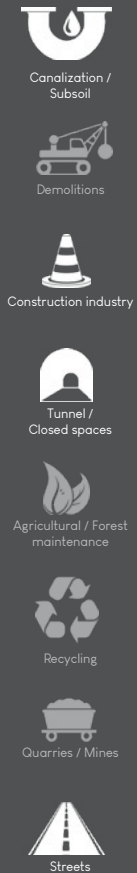

DATA SHEET		Mini and midi excavators□ Single cam			Large excavators□ Double cam		
		PV 20	PV 30	PV 45	PV 60	PV 75	PV 90
Excavator	ton	≥ 1 < 3	≥ 3,5 < 6	≥ 7 < 10	≥ 11 < 14	≥ 15 < 22	≥ 23 ≤ 30
Vibrating unit							
Weight	kg	150	230	420	920	1180	1315
Vibrating frequency	n/min	2000	2000	2000	2200	2200	2200
Centrifugal force	Kn	25	40	55	130	160	200
Pressure	bar	150	150	150	180	180	230
Flow	(l.	□	□	□	□	□	□
Back pressure max	bar	7	7	7	7	7	7
IMFDMBNQ							
Weight	kg	150	150	150	280	280	400
Pressure	bar	150	150	150	180	180	230
Max. gripper opening		□	□	□	□	□	□

Weights and dimensions could vary without notice. Weight does not include the coupler.