
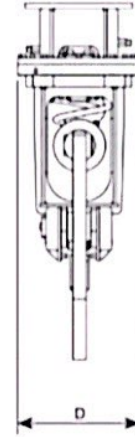


MINI CRUSHER

Spec. (US Unit)

- ▲ Lightweight design for stability of operating machine
- ▲ One cylinder system for powerful crushing and speed
- ▲ High strength and wear resistance materials for reliability

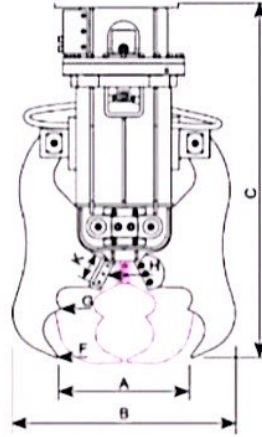

Description	Units	CRO10R	CRO20R	CRO30R	CRO50H	
Weight	lb	231	397	816	1,058	
Max Opening Width	A	in	11.0	14.2	16.9	20.5
Overall Width	B	in	22.4	27.1	30.2	33.5
Overall Length	C	in	32.3	38.3	48.4	53.6
Overall Height	D	in	10.2	11.4	13.8	18.3
Crushing Force	F	US ton	21 (@3,000psi)	23 (@3,000psi)	29 (@3,000psi)	35 (@3,000psi)
	G	US ton	33 (@3,000psi)	34 (@3,000psi)	41 (@3,000psi)	54 (@3,000psi)
Cutting Force	H	US ton	56 (@3,000psi)	65 (@3,000psi)	88 (@3,000psi)	112 (@3,000psi)
Cutting Length	K	in	3.0	3.9	3.9	3.9
Allowable Max. Setting Pressure	psi	4,000	4,000	4,000	4,300	
Swing Motor Setting Pressure	psi	-	-	-	1,100	
Recommended Oil Flow	Cylinder	gpm	2.6 ~ 9.2	4.0 ~ 11.9	7.9 ~ 19.8	13.2 ~ 23.8
	S / Motor	gpm	-	-	-	2.6 ~ 4.0
Rotating	-	-	Free	-	Hydraulic	
Recommended Carrier Weight	Ton	1 ~ 4	2 ~ 3	3.5 ~ 5	5 ~ 9	

*Above specifications are subject to change without prior notice.

International attachments Inc.

www.iai-usa.com | 1-877-219-1962 | Email: info@iai-usa.com
Worldwide sales and service, On site Training and maintenance.